

PS21L



Limit switches in 30mm housing



Main features

- Plastic or metal 30mm housing
- Slow-action and snap-action contacts
- Contacts options: 1NO+1NC, 2NC, 2NO, 1NO+1NC overlapping
- Zb type contacts
- Positive opening contacts operation \ominus (EN 60947-5-1)
- Double insulation \square (plastic type)
- Degree of protection IP65 or IP66

Applications

Used to monitor position and travel limit, objects passing and counting.

Cable entry and connector types



Cable gland



DT04 connector



M12 connector

Dimensions [mm/inches]

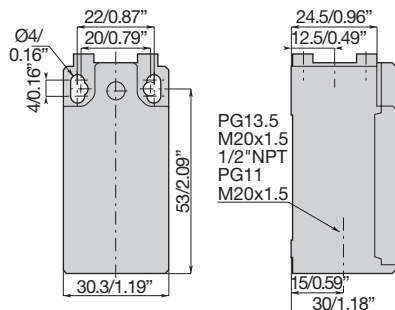


Fig. 1 PS21L-A/B/M/N/P plastic housing

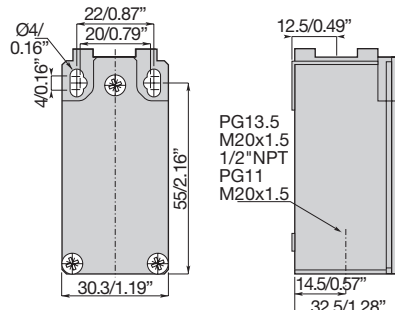


Fig. 2 PS21L-A/B/M/N/P metal housing

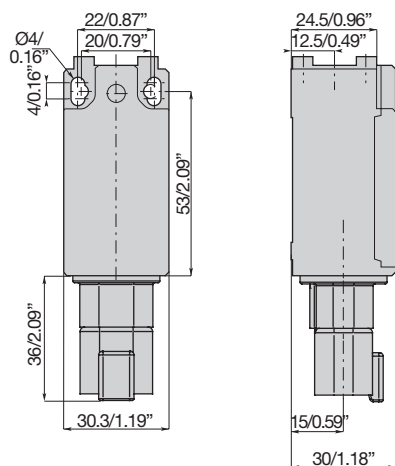


Fig. 3 PS21L-D plastic housing

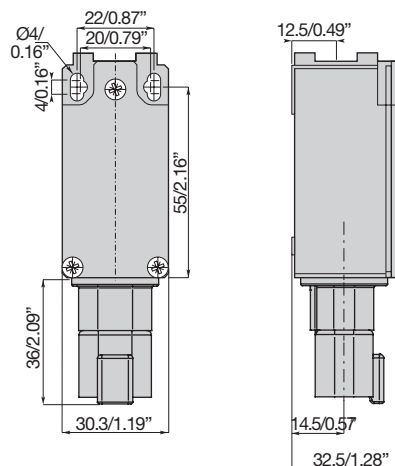


Fig. 4 PS21L-D metal housing

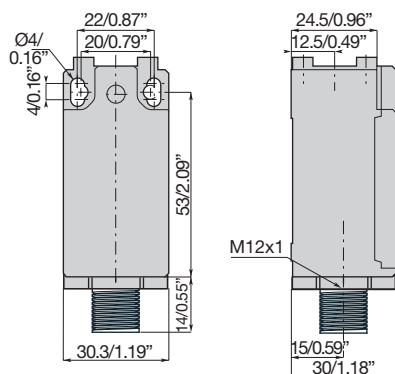


Fig. 5 PS21L-M1 plastic housing


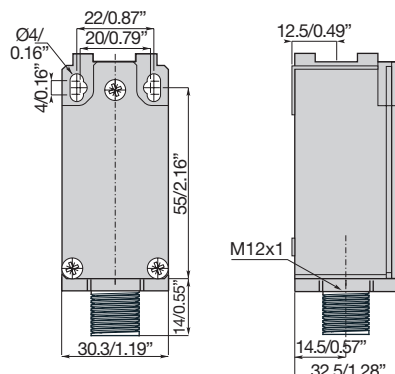


Fig. 6 PS21L-M1 metal housing

Nomenclature - Plastic housing types



PS21L - **a** **bbb** **cc** - **d** 00

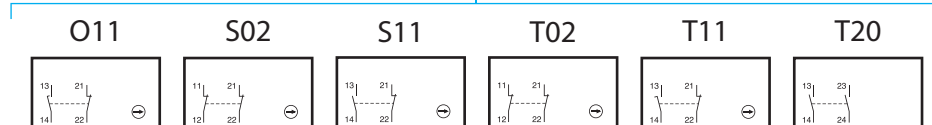

a: cable connection

bbb: contact type

cc: actuator type


d: housing material

Order code


PS21L - - 00

Code	Option	Description
PS21L	-	Limit switch, 30mm width
<input type="checkbox"/>	-	Cable entry
	A	M16
	B	PG11
	D	DT04 connector
	M	M20
	M1	M12 connector
	N	1/2 NPT
	P	PG13.5
<input type="checkbox"/>	-	Contact type
	O11	1NO+1NC overlap slow(+)
	S02	2NC snap(+)
	S11	1NO+1NC snap(+)
	T02	2NC slow(+)
	T11	1NO+1NC slow(+)
	T20	2NO slow
<input type="checkbox"/>	-	Actuator type
	BE	Nylon roller external bent lever
	BR	Nylon roller internal bent lever
	LA	Adjustable lever Ø3 stainless steel rod
	LB	Nylon actuator with stainless steel spring
	LG	Adjustable fiberglass rod lever Ø6
	LO	Steel plunger with nylon roller + gasket
	LP	Multidirection nylon actuator with stainless steel spring
	LS	Stainless steel spring multidirection actuator
	LW	Stainless steel spring multidirection actuator (cat Whisker)
	N6	Pull wire
	P0	Metal plain plunger
	PH	Metal plunger + gasket
	PR	Metal roller plunger
	R1	Adjustable lever with nylon roller
	RH	Plastic roller lever on metal plunger (left)
	RT	Nylon roller lever
	RV	Plastic roller lever on metal plunger (right)
	W0	Ø50 rubber roller lever
W1	Adjustable lever with Ø50 rubber roller	
<input type="checkbox"/>	-	Housing material
	H	Plastic housing and metal head
	T	Plastic housing and plastic head
00	-	No option

Nomenclature - Metal housing types

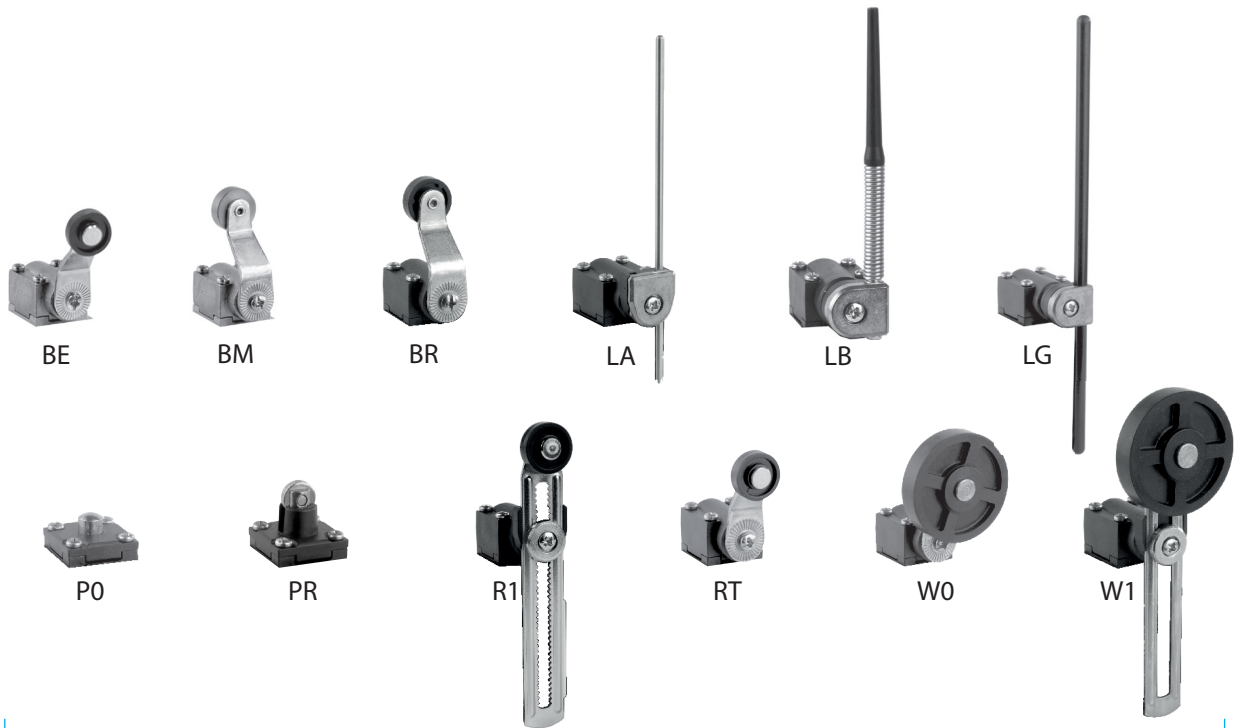

PS21L - **a** **bbb** **cc** - **d** 00

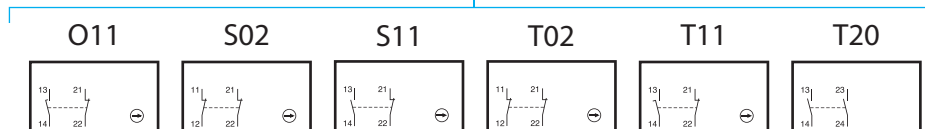

a: cable connection

bbb: contact type

cc: actuator type

d: housing material

Order code

PS21L - - M 00

Code	Option	Description
PS21L	-	Limit switch, 30mm width
<input type="checkbox"/>	-	Cable entry:
	A	M16
	B	PG11
	D	DT04 connector
	M	M20
	M1	M12 connector
	N	1/2 NPT
	P	PG13.5
<input type="checkbox"/>	-	Contact type:
	O11	1NO+1NC overlap slow(+)
	S02	2NC snap(+)
	S11	1NO+1NC snap(+)
	T02	2NC slow(+)
	T11	1NO+1NC slow(+)
	T20	2NO slow
<input type="checkbox"/>	-	Actuator type:
	BE	Nylon roller external bent lever
	BM	Metal roller bent lever
	BR	Nylon roller internal bent lever
	LA	Adjustable lever Ø3 stainless steel rod
	LB	Nylon actuator with stainless steel spring
	LG	Adjustable fiberglass rod lever Ø6
	P0	Metal plain plunger
	PR	Metal roller plunger
	R1	Adjustable lever with nylon roller
	RT	Nylon roller lever
	W0	Ø50 rubber roller lever
	W1	Adjustable lever with Ø50 rubber roller
M	-	Metal housing and metal head
00	-	No option

Features

Electrical data

		PS21L - xxx - H or T	PS21L - xxx - M
Rated operational current IEC 60947-5-1			
Ie/AC-15	24Vac - 50/60Hz	10 A	10 A
	240Vac - 50/60Hz	6 A (3 A - S02 contacts)	6 A (3 A - S02 contacts)
	400Vac - 50/60Hz	4 A	4 A
Ie/DC-13	24Vdc	6 A	6 A
	125Vdc	0,55 A	0,55 A
	250Vdc	0,4 A	0,4 A
Rated operational current UL 508, CSA C22-2 n°14			
	AC ratings	A 600	A 300
	DC ratings	Q 600	Q 300
Rated insulation voltage Ui IEC 60947-5-1		500V (S02 versions Ui=400 V)	500V (S02 versions Ui=400 V)
Rated insulation voltage Ui UL 508, CSA C22-2 n°14		A 600, Q 600	A 300, Q 300
Rated impulse withstand voltage Uimp IEC 60947-5-1/EN 60947-5-1		6 kV	6 kV
Thermal current I_{th} - q < 40°C/104°F IEC 60947-5-1/EN 60947-5-1		10 A	10 A
Electrical durability IEC 60947-5-1			
Max switching frequency		3600 cycles/h	3600 cycles/h
Load factor		0,5	0,5
Max switching operations Refer to diagrams AC-15 and DC-13 use categories			
Short circuit protection gG type fuses		10 A	10 A
Protection against electrical shocks IEC 536		Class II	Class II

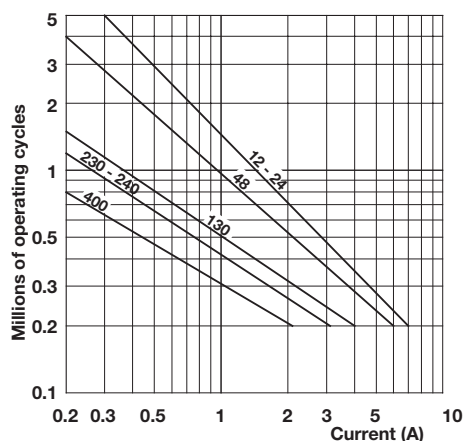


Fig. 7 Diagram for snap action contact

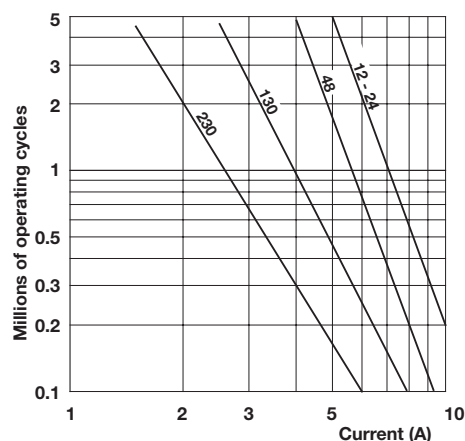


Fig. 8 Diagram for slow action contact

Electrical durability for DC-13 utilization category

Switching power for a durability of 5 million operating cycles:

Voltage	Snap action	Slow action
24V	9.5W	12W
48V	6.8W	9W
110V	3.6W	6W


Mechanical data

	PS21L - xxx - T	PS21L - xxx - H	PS21L - xxx - M
Housing material	Plastic	Plastic	Metal
Actuator head material	Plastic	Metal	Metal
Weight	≥ 70g	≥ 75g	≥ 180g
Wiring connections Versions with PG gland A, B, M, N, P			
Screw terminals	M3,5 (+,-) pozidriv 2 screw with cable clamp		
Wire dimensions	0,5 mm ² ÷ 2,5 mm ² - AWG 20 ÷ AWG 14		
Screw terminals marking	according to IEC 60947-5-1		

Environmental

	PS21L - xxx - T	PS21L - xxx - H	PS21L - xxx - M
Operating temperature	-25° to +70°C (-13° to +158°F)		
Storage temperature	-30° to +80°C (-22° to +176°F)		
Resistance to shocks IEC 68-2-27 and EN 60068-2-27	50g/1.76oz (25g/0,88oz for W0 and W1 actuator types) (1/2 sinusoidal shock for 11ms) no change in contact position		
Resistance to vibrations IEC 68-2-6 and EN 60068-2-6	25g/0.88oz (10...500Hz) no change in position of contacts greater than 100µs		
Degree of protection IEC 529 and EN 60529	IP65	IP65	IP66 (IP65 W1, LG actuator types)
Pollution degree	3		

Compatibility and conformity


Conforms to the standards	IEC 60947-1, IEC 60947-5-1, EN 60947-1, EN 60947-5-1, UL508 and CSA C22-2 n°14
Climatic withstand	According to IEC 68-2-3 and salty mist according to IEC 68-2-11
Consistency	0.1mm/0.004" (upon closing point) measured over 1 million operations
Approvals	

Cable connection


Pin-out

PS21L-A
PS21L-B
PS21L-M
PS21L-N
PS21L-P


PS21L-M1-H/T



PS21L-M1-M



PS21L-D





Contact model	Contact type	Terminals connection	Pin of M12 connector	Pin of DT04 connector
S11	Normally Closed (NC)	21	1	1
		22	2	4
	Normally Open (NO)	13	3	2
		14	4	3
T11	Normally Closed (NC)	21	1	1
		22	2	4
	Normally Open (NO)	13	3	2
		14	4	3
O11	Normally Closed (NC)	21	1	1
		22	2	4
	Normally Open (NO)	13	3	2
		14	4	3
S02	Normally Closed (NC)	21	1	1
		22	2	4
	Normally Closed (NC)	11	3	2
		12	4	3
T02	Normally Closed (NC)	21	1	1
		22	2	4
	Normally Closed (NC)	11	3	2
		12	4	3
T20	Normally Open (NO)	23	1	1
		24	2	4
	Normally Open (NO)	13	3	2
		14	4	3

Plastic housing

PS21L - □ □ BE

Dimensions [mm/inches]

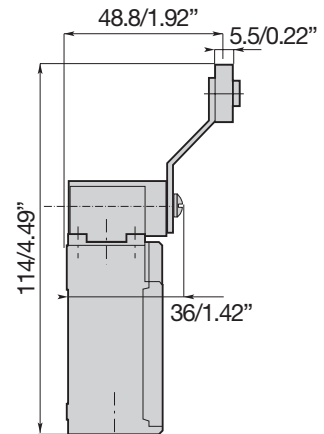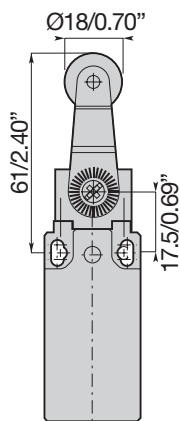

Contact type




Fig. 9 S11




Fig. 10 T11




Fig. 11 O11




Fig. 12 T02




Fig. 13 T20






Fig. 14 S02

Features

Normally Closed contact	⊖ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	1.5m/s / 4.92ft/s
Min. force or torque	0.10N / 0.32Nm
Weight	95g / 3.351oz
Mechanical Durability	10 millions of operation
B10d	20 millions of operation

PS21L - □ □ BR

► Dimensions [mm/inches]

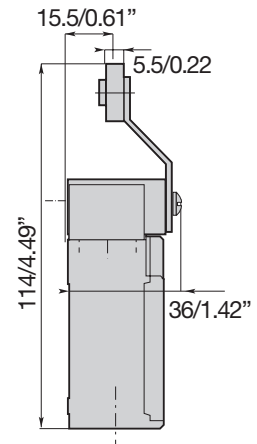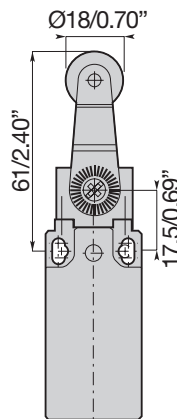

► Contact type




Fig. 15 S11




Fig. 16 T11




Fig. 17 O11




Fig. 18 T02




Fig. 19 T20





Fig. 20 S02

► Features

Normally Closed contact	⊖ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	1.5m/s / 4.92ft/s
Min. force or torque	0.10N / 0.32Nm
Weight	95g / 3.351oz
Mechanical Durability	10 millions of operation
B10d	20 millions of operation

PS21L - □ □ LA

► Dimensions [mm/inches]

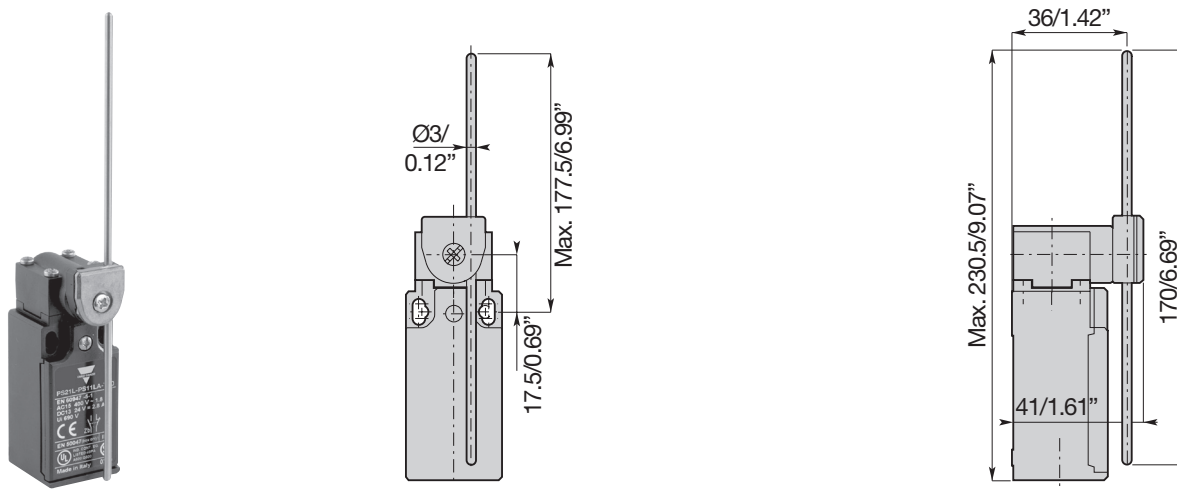

► Contact type




Fig. 21 S11




Fig. 22 T11




Fig. 23 O11




Fig. 24 T02




Fig. 25 T20







Fig. 26 S02

► Features







Normally Closed contact	⊕ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	1.5m/s / 4.92ft/s
Min. force or torque	0.10N / 0.32Nm
Weight	105g / 3.704oz
Mechanical Durability	10 millions of operation
B10d	20 millions of operation

PS21L - □ □ LB

► Dimensions [mm/inches]

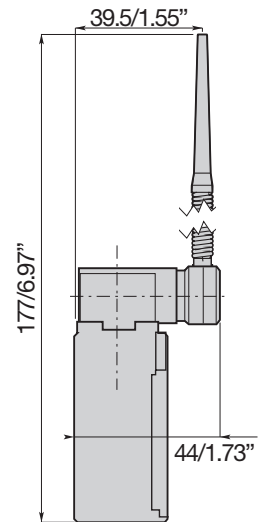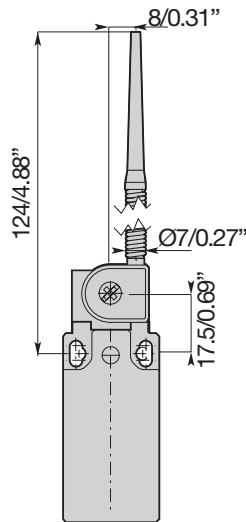

► Contact type





► Features

Normally Closed contact	⊖ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	1.5m/s / 4.92ft/s
Min. force or torque	0.10N / 0.32Nm
Weight	105g / 3.704oz
Mechanical Durability	10 millions of operation
B10d	20 millions of operation

PS21L - □ □ LG

Dimensions [mm/inches]

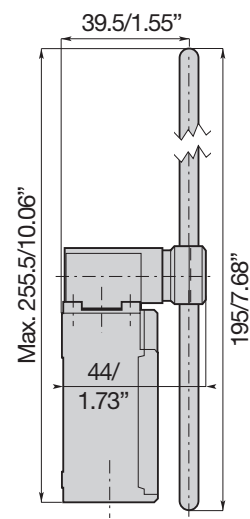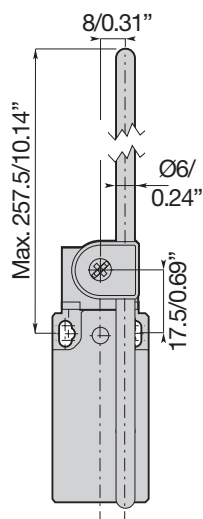

Contact type





Fig. 33 S11





Fig. 34 T11





Fig. 35 O11





Fig. 36 T02




Fig. 37 T20







Fig. 38 S02

Features







Normally Closed contact	⊖ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	1.5m/s / 4.92ft/s
Min. force or torque	0.10N / 0.32Nm
Weight	115g / 4.056oz
Mechanical Durability	10 millions of operation
B10d	20 millions of operation

PS21L - □ □ LO

► Dimensions [mm/inches]

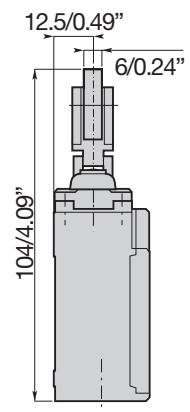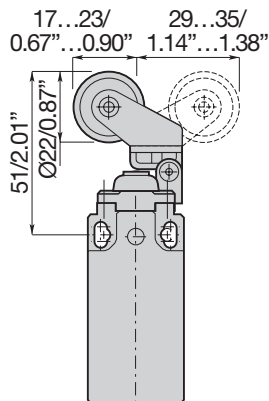

► Contact type





► Features

Normally Closed contact	⊖ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	1m/s / 3.28ft/s
Min. force or torque	7N / 24Nm
Weight	80g / 2.822oz
Mechanical Durability	5 millions of operation
B10d	10 millions of operation

PS21L - □ □ LP

Dimensions [mm/inches]

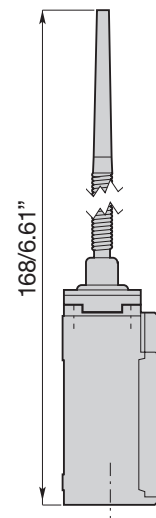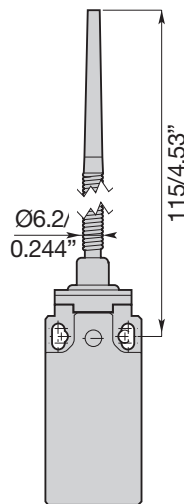

Contact type




Fig. 45 S11




Fig. 46 T11




Fig. 47 O11




Fig. 48 T02




Fig. 49 T20






Fig. 50 S02

Features

Max. Actuation speed	1m/s / 3.28ft/s
Min. force or torque	0.12N
Weight	85g / 2.998oz
Mechanical Durability	5 millions of operation
B10d	10 millions of operation

PS21L - □ □ LS

► Dimensions [mm/inches]

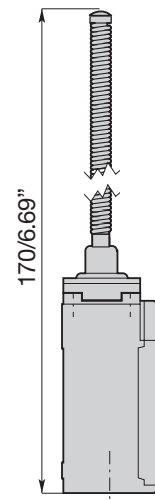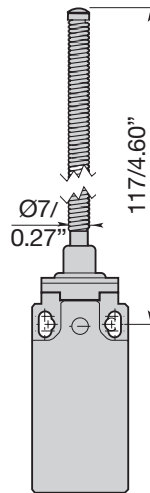

► Contact type




Fig. 51 S11




Fig. 52 T11




Fig. 53 O11




Fig. 54 T02




Fig. 55 T20






Fig. 56 S02

► Features

Max. Actuation speed	1m/s / 3.28ft/s
Min. force or torque	0.12N
Weight	90g / 3.175oz
Mechanical Durability	5 millions of operation
B10d	10 millions of operation

PS21L - □ □ LW

Dimensions [mm/inches]

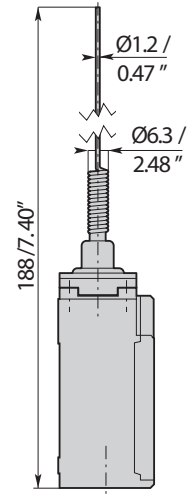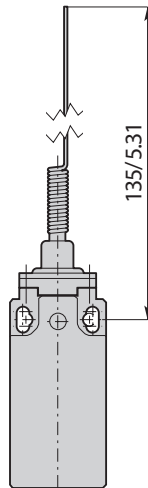

Contact type




Fig. 57 S11




Fig. 58 T11




Fig. 59 O11




Fig. 60 T02




Fig. 61 T20





Fig. 62 S02

Features

Max. Actuation speed	1m/s / 3.28ft/s
Min. force or torque	0.12N
Weight	80g / 2.822oz
Mechanical Durability	5 millions of operation
B10d	10 millions of operation

PS21L - □ □ N6

► Dimensions [mm/inches]

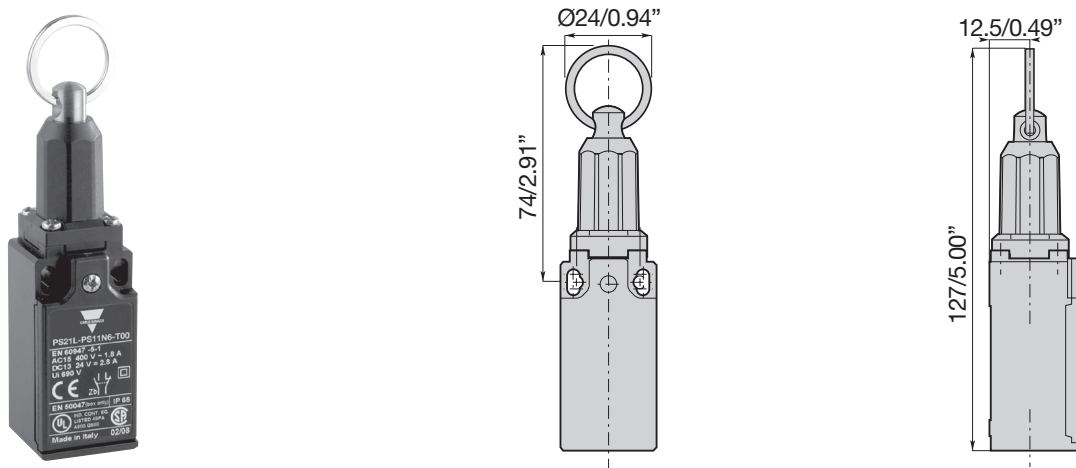

► Contact type




Fig. 63 S11




Fig. 64 T11




Fig. 65 O11




Fig. 66 T02






Fig. 67 T20

► Features

Max. Actuation speed	0.5m/s / 1.64ft/s
Min. force or torque	30N
Weight	115g / 4.056oz
Mechanical Durability	5 millions of operation
B10d	10 millions of operation

PS21L - □ □ P0

► Dimensions [mm/inches]



► Contact type




Fig. 68 S11




Fig. 69 T11




Fig. 70 O11




Fig. 71 T02




Fig. 72 T20






Fig. 73 S02

► Features

Normally Closed contact	⊕ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	0.5m/s / 1.64ft/s
Min. force or torque	15N / 30Nm
Weight	70g / 2.469oz
Mechanical Durability	15 millions of operation
B10d	30 millions of operation

PS21L - □ □ PH

Dimensions [mm/inches]



Contact type




Fig. 74 S11




Fig. 75 T11




Fig. 76 O11




Fig. 77 T02




Fig. 78 T20






Fig. 79 S02

Features

Normally Closed contact	⊖ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	0.5m/s / 1.64ft/s
Min. force or torque	15N / 30Nm
Weight	70g / 2.469oz
Mechanical Durability	5 millions of operation
B10d	10 millions of operation

PS21L - □ □ PR

Dimensions [mm/inches]

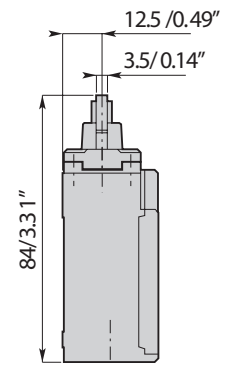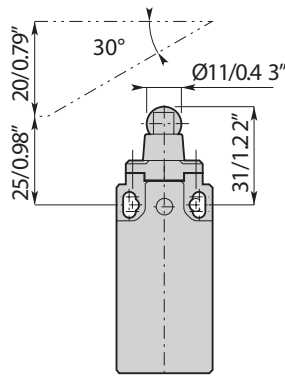

Contact type




Fig. 80 S11




Fig. 81 T11




Fig. 82 O11




Fig. 83 T02




Fig. 84 T20






Fig. 85 S02

Features

Normally Closed contact	⊖ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	0.3m/s / 0.98ft/s
Min. force or torque	12N / 30Nm
Weight	75g / 2.645oz
Mechanical Durability	15 millions of operation
B10d	30 millions of operation

PS21L - □ □ R1

► Dimensions [mm/inches]

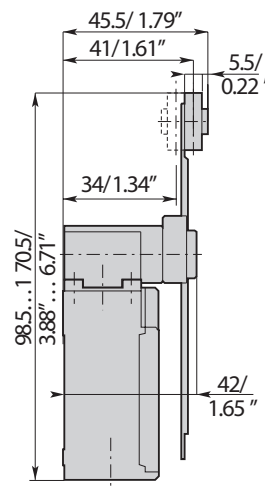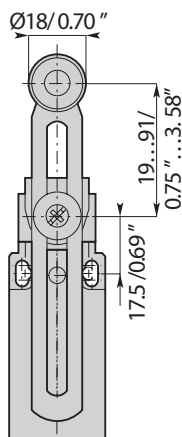

► Contact type




Fig. 86 S11




Fig. 87 T11




Fig. 88 O11




Fig. 89 T02




Fig. 90 T20






Fig. 91 S02

► Features

Normally Closed contact	⊖ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	1.5m/s / 4.92ft/s
Min. force or torque	0.10N / 0.32Nm
Weight	105g / 3.704oz
Mechanical Durability	10 millions of operation
B10d	20 millions of operation

PS21L - □ □ RH

► Dimensions [mm/inches]

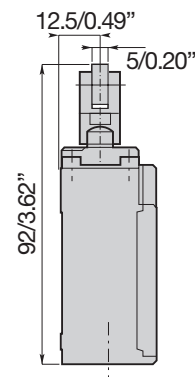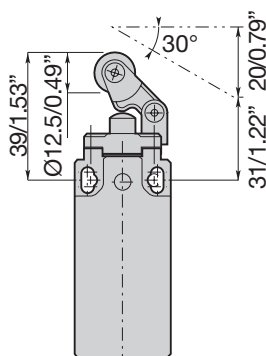

► Contact type




Fig. 92 S11




Fig. 93 T11




Fig. 94 O11




Fig. 95 T02




Fig. 96 T20






Fig. 97 S02

► Features

Normally Closed contact	⊕ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	1m/s / 3.28ft/s
Min. force or torque	7N / 24Nm
Weight	75g / 2.645oz
Mechanical Durability	15 millions of operation
B10d	30 millions of operation

PS21L - □ □ RT

► Dimensions [mm/inches]

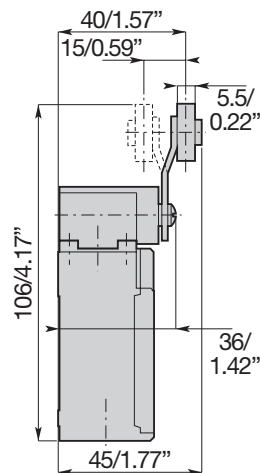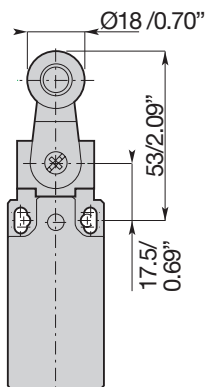

► Contact type




Fig. 98 S11




Fig. 99 T11




Fig. 100 O11




Fig. 101 T02




Fig. 102 T20






Fig. 103 S02

► Features

Normally Closed contact	⊕ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	1.5m/s / 4.92ft/s
Min. force or torque	0.10N / 0.32Nm
Weight	95g / 3.351oz
Mechanical Durability	10 millions of operation
B10d	20 millions of operation

PS21L - □ □ RV

► Dimensions [mm/inches]

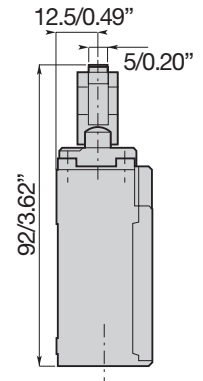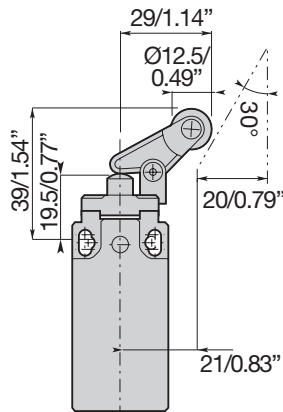

► Contact type




Fig. 104 S11




Fig. 105 T11




Fig. 106 O11




Fig. 107 T02




Fig. 108 T20






Fig. 109 S02

► Features







Normally Closed contact	⊖ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	1m/s / 3.28ft/s
Min. force or torque	7N / 24Nm
Weight	80g / 2.822oz
Mechanical Durability	15 millions of operation
B10d	30 millions of operation

PS21L - □ □ W0

► Dimensions [mm/inches]

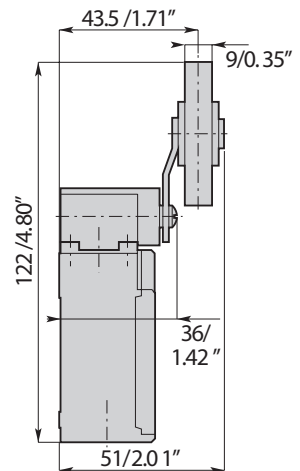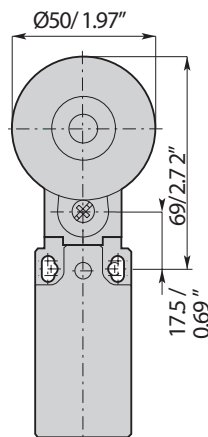

► Contact type






► Features

Normally Closed contact	⊕ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	1.5m/s / 4.92ft/s
Min. force or torque	0.10N / 0.32Nm
Weight	115g / 4.056oz
Mechanical Durability	10 millions of operation
B10d	20 millions of operation

PS21L - □ □ W1

► Dimensions [mm/inches]

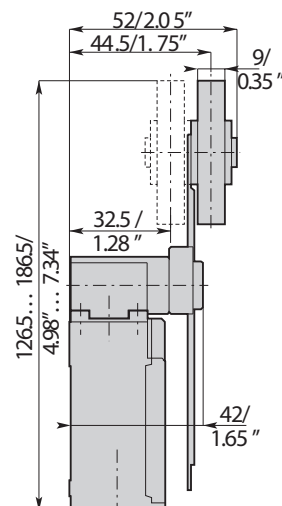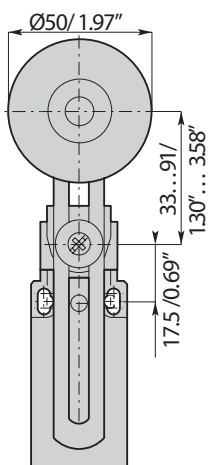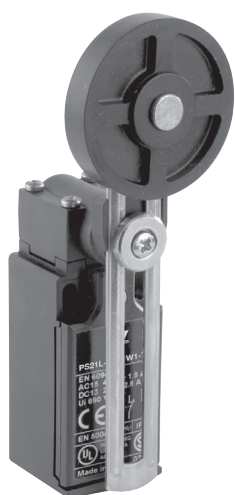

► Contact type




Fig. 116 S11




Fig. 117 T11




Fig. 118 O11




Fig. 119 T02




Fig. 120 T20




Fig. 121 S02



► Features

Normally Closed contact	⊖ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	1.5m/s / 4.92ft/s
Min. force or torque	0.10N / 0.32Nm
Weight	125g / 4.409oz
Mechanical Durability	10 millions of operation
B10d	20 millions of operation

Metal housing

PS21L - BE

Dimensions [mm/inches]

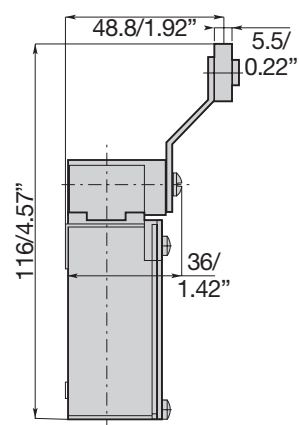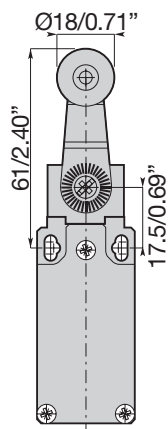

Contact type





Fig. 122 S11





Fig. 123 T11





Fig. 124 O11





Fig. 125 T02




Fig. 126 T20







Fig. 127 S02

Features







Normally Closed contact	⊖ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	1.5m/s / 4.92ft/s
Min. force or torque	0.10N / 0.32Nm
Weight	250g / 8.818oz
Mechanical Durability	10 millions of operation
B10d	20 millions of operation

PS21L - BM

► Dimensions [mm/inches]

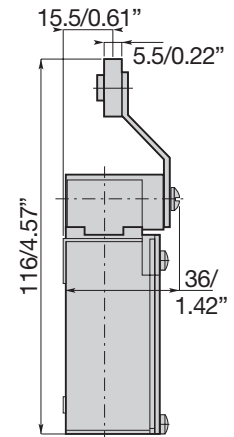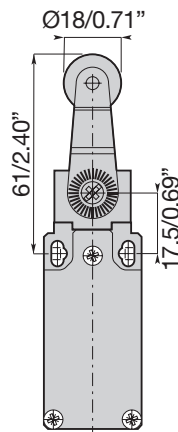

► Contact type





► Features

Normally Closed contact	⊖ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	1.5m/s / 4.92ft/s
Min. force or torque	0.10N / 0.32Nm
Weight	250g / 8.818oz
Mechanical Durability	10 millions of operation
B10d	20 millions of operation

PS21L - □ □ BR

► Dimensions [mm/inches]

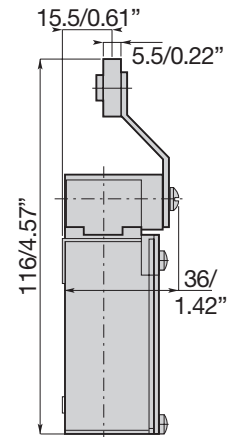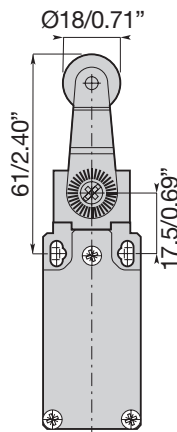

► Contact type




Fig. 134 S11




Fig. 135 T11




Fig. 136 O11




Fig. 137 T02




Fig. 138 T20






Fig. 139 S02

► Features

Normally Closed contact	⊖ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	1.5m/s / 4.92ft/s
Min. force or torque	0.10N / 0.32Nm
Weight	250g / 8.818oz
Mechanical Durability	10 millions of operation
B10d	20 millions of operation

PS21L - □ □ LA

Dimensions [mm/inches]

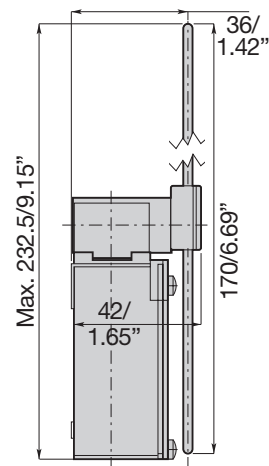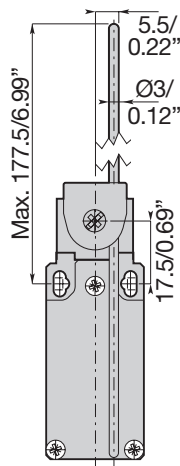

Contact type




Fig. 140 S11




Fig. 141 T11




Fig. 142 O11




Fig. 143 T02




Fig. 144 T20






Fig. 145 S02

Features

Normally Closed contact	⊕ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	1.5m/s / 4.92ft/s
Min. force or torque	0.10N / 0.32Nm
Weight	245g / 8.642oz
Mechanical Durability	10 millions of operation
B10d	20 millions of operation

PS21L - □ □ LB

► Dimensions [mm/inches]

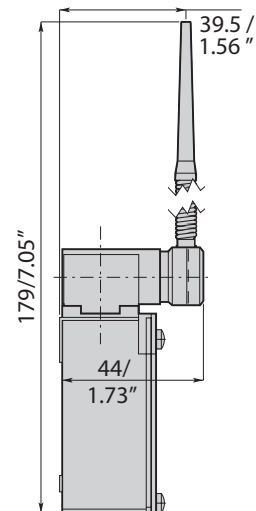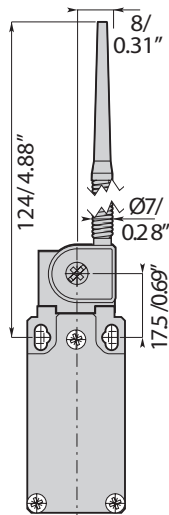

► Contact type





Fig. 146 S11





Fig. 147 T11





Fig. 148 O11





Fig. 149 T02




Fig. 150 T20







Fig. 151 S02

► Features

Normally Closed contact	⊖ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	1.5m/s / 4.92ft/s
Min. force or torque	0.10N / 0.32Nm
Weight	245g / 8.642oz
Mechanical Durability	10 millions of operation
B10d	20 millions of operation

PS21L - □ □ LG

► Dimensions [mm/inches]

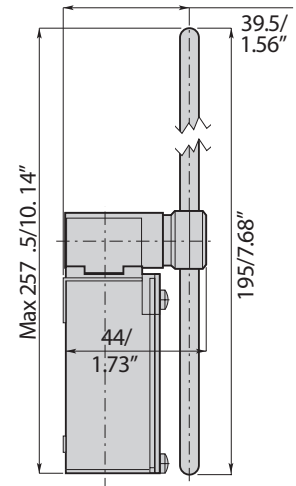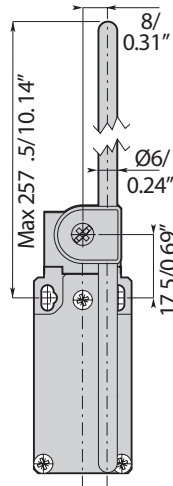

► Contact type




Fig. 152 S11




Fig. 153 T11




Fig. 154 O11




Fig. 155 T02




Fig. 156 T20






Fig. 157 S02

► Features

Normally Closed contact	⊖ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	1.5m/s / 4.92ft/s
Min. force or torque	0.10N / 0.32Nm
Weight	255g / 8.995oz
Mechanical Durability	10 millions of operation
B10d	20 millions of operation

PS21L - □ □ P0

► Dimensions [mm/inches]



► Contact type




Fig. 158 S11




Fig. 159 T11




Fig. 160 O11




Fig. 161 T02




Fig. 162 T20






Fig. 163 S02

► Features

Normally Closed contact	⊖ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	0.5m/s / 1.64ft/s
Min. force or torque	15N / 30Nm
Weight	180g / 6.349oz
Mechanical Durability	15 millions of operation
B10d	30 millions of operation

PS21L - □ □ PR

► Dimensions [mm/inches]

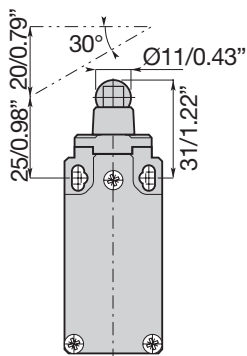

► Contact type




Fig. 164 S11




Fig. 165 T11




Fig. 166 O11




Fig. 167 T02




Fig. 168 T20






Fig. 169 S02

► Features

Normally Closed contact	⊖ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	0.3m/s / 0.98ft/s
Min. force or torque	12N / 30Nm
Weight	190g / 6.702oz
Mechanical Durability	15 millions of operation
B10d	30 millions of operation

PS21L - □ □ R1

► Dimensions [mm/inches]

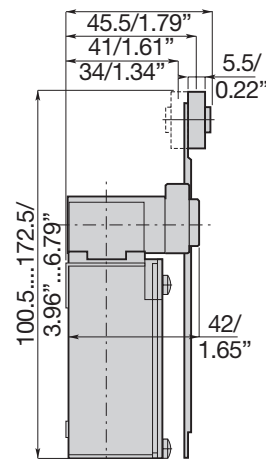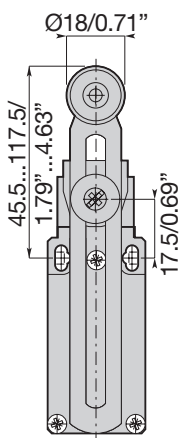

► Contact type




Fig. 170 S11




Fig. 171 T11




Fig. 172 O11




Fig. 173 T02




Fig. 174 T20






Fig. 175 S02

► Features

Normally Closed contact	⊕ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	1.5m/s / 4.92ft/s
Min. force or torque	0.10N / 0.32Nm
Weight	245g / 8.642oz
Mechanical Durability	10 millions of operation
B10d	20 millions of operation

PS21L - □ □ RT

► Dimensions [mm/inches]

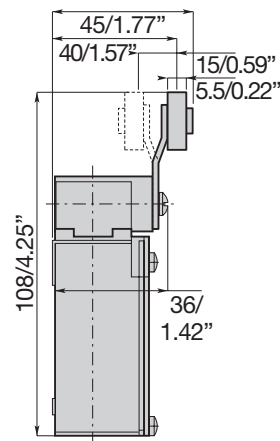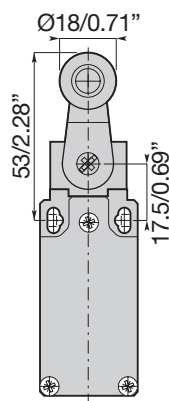

► Contact type




Fig. 176 S11




Fig. 177 T11




Fig. 178 O11




Fig. 179 T02




Fig. 180 T20






Fig. 181 S02

► Features

Normally Closed contact	⊕ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	1.5m/s / 4.92ft/s
Min. force or torque	0.10N / 0.32Nm
Weight	235g / 8.289oz
Mechanical Durability	10 millions of operation
B10d	20 millions of operation

PS21L - □ □ W0

► Dimensions [mm/inches]

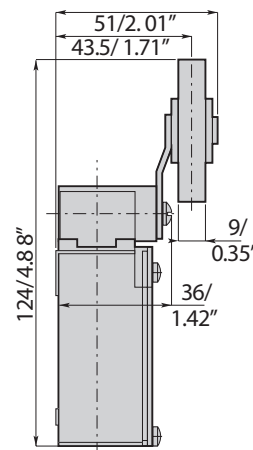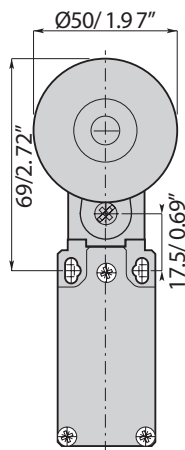

► Contact type




Fig. 182 S11




Fig. 183 T11




Fig. 184 O11




Fig. 185 T02




Fig. 186 T20







Fig. 187 S02

► Features

Normally Closed contact	⊕ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	1.5m/s / 4.92ft/s
Min. force or torque	0.10N / 0.32Nm
Weight	255g / 8.995oz
Mechanical Durability	10 millions of operation
B10d	20 millions of operation

PS21L - □ □ W1

► Dimensions [mm/inches]

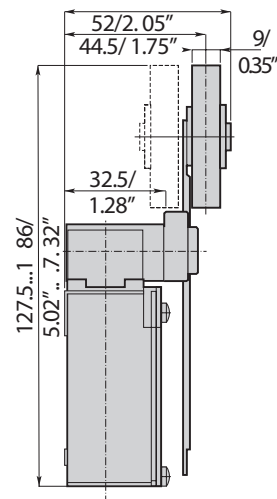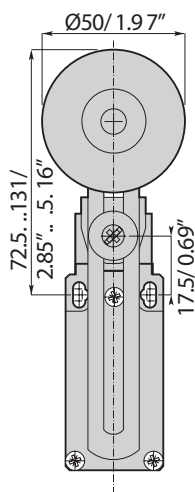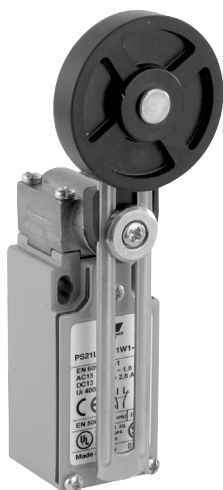

► Contact type




Fig. 188 S11




Fig. 189 T11




Fig. 190 O11




Fig. 191 T02




Fig. 192 T20




Fig. 193 S02

► Features

Normally Closed contact	⊕ positive opening operation as per IEC 60947-5-1
Max. Actuation speed	1.5m/s / 4.92ft/s
Min. force or torque	0.10N / 0.32Nm
Weight	265g / 9.348oz
Mechanical Durability	10 millions of operation
B10d	20 millions of operation



COPYRIGHT ©2021

Content subject to change. Download the PDF: www.gavazziautomation.com